

FIG. 1

PRIOR ART

Time-delay fiber-based interferometric receiver
using a photo-emf sensor

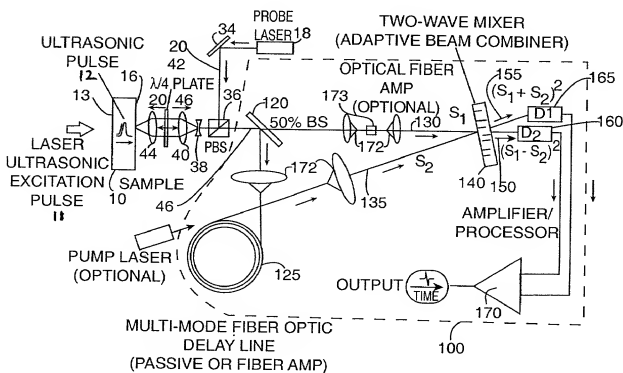


FIG. 2

Time-delay fiber-based coherent detection
system using an adaptive beam combiner (a two-wave mixer).

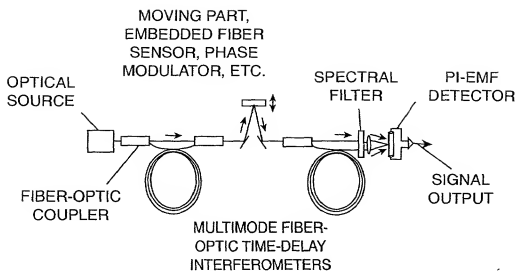


FIG. 3

PRIOR ART

Dual-fiber time-delay line system using
a photo-emf sensor

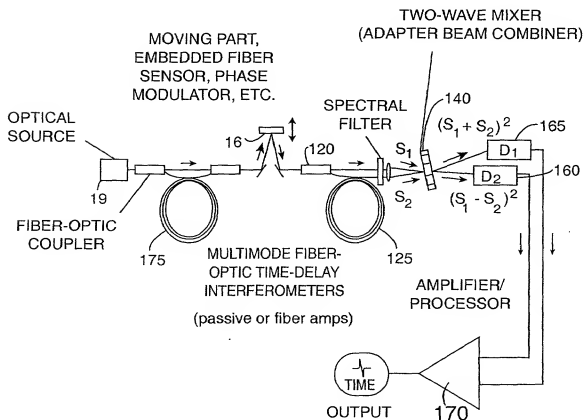


FIG 4.

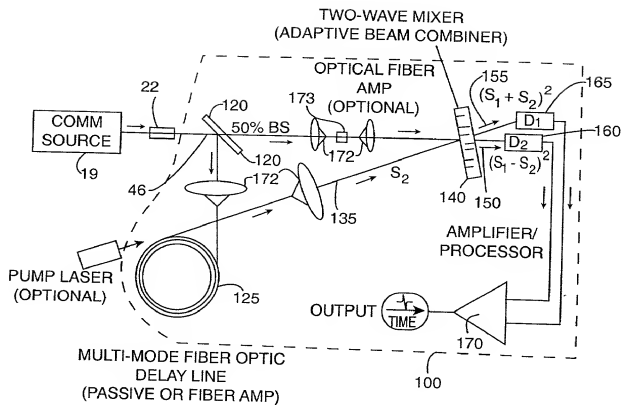


FIG. 5
Time-delay fiber-based coherent detection system using an adaptive beam combiner (a two-wave mixer).

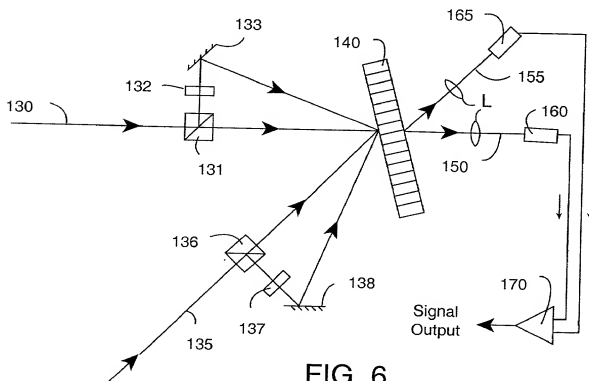


FIG. 6